



EITEL-McCULLOUGH, INC.
SAN CARLOS · CALIFORNIA

TENTATIVE DATA

3-400Z

**HIGH-MU
POWER TRIODE**

The Eimac 3-400Z is a compact power triode intended to be used as a zero-bias Class-B amplifier in audio or radio-frequency applications. Operation with zero grid bias simplifies associated circuitry by eliminating the bias supply. In addition, grounded-grid operation is attractive since a power gain as high as twenty times can be obtained with the 3-400Z in a cathode-driven circuit.

GENERAL CHARACTERISTICS

ELECTRICAL

Filament:	Thoriated Tungsten				
Voltage	-	-	-	5.0	volts
Current	-	-	-	14.5	amperes
Amplification Factor (Average)				200	

Interelectrode Capacitances (Average): †

Grid-Filament	-	-	-	7.4	uuf
Grid-Plate	-	-	-	4.1	uuf
Plate-Filament	-	-	-	0.07	uuf
Frequency for Maximum Ratings	-	-	-	110	Mc

MECHANICAL

Base	-	-	-	-	-	5 Pin Special
Basing	-	-	-	-	-	See Drawing
Mounting Position	-	-	-	-	-	Vertical, base down or up
Cooling	-	-	-	-	-	Radiation and forced air
Heat-Dissipating Plate Connector	-	-	-	-	-	Supplied mounted on tube
Recommended Socket	-	-	-	-	-	Eimac SK-400 series
Recommended Chimney	-	-	-	-	-	Eimac SK-416
Maximum Operating Temperatures:						
Plate Seal	-	-	-	-	-	225°C
Base Seals	-	-	-	-	-	200°C
▶ Maximum Over-all Dimensions:						
Height	-	-	-	-	-	5.82 inches
Diameter	-	-	-	-	-	3.57 inches
Net Weight	-	-	-	-	-	7 ounces

† In Shielded Fixture





R-F LINEAR AMPLIFIER
GROUNDED-GRID, CLASS-B

MAXIMUM RATINGS	
D-C PLATE VOLTAGE	3000 MAX. VOLTS
D-C PLATE CURRENT	0.400 MAX. AMP
PLATE DISSIPATION	400 MAX. WATTS
GRID DISSIPATION	20 MAX. WATTS

TYPICAL OPERATION (Single-Tone
Conditions)

D-C Plate Voltage	3000 volts
Zero-Sig D-C Plate Current*	100 ma
Max-Sig D-C Plate Current	333 ma
Max-Sig D-C Grid Current	120 ma
Driving Impedance	122 ohms
Resonant Load Impedance	4750 ohms
Max-Sig Driving Power	32 ohms
Peak Envelope Plate Output Power	655 watts

TYPICAL OPERATION (Minimum Distortion
Products at 1 KW PEP Input)

D-C Plate Voltage	2500 volts
Zero-Sig D-C Plate Current*	73 ma
Single-Tone D-C Plate Current	400 ma
Single-Tone D-C Grid Current	142 ma
Two-Tone D-C Plate Current	274 ma
Two-Tone D-C Grid Current	82 ma
Peak Envelope Useful Output Power	560 watts
Resonant Load Impedance	3450 ohms
Intermodulation Distortion Products - 35 db or more below PEP level	

TYPICAL OPERATION (Minimum Distortion
Products)

D-C Plate Voltage	2000 volts
Zero-Sig D-C Plate Current*	62 ma
Single-Tone D-C Plate Current	400 ma
Single-Tone D-C Grid Current	148 ma
Two-Tone D-C Plate Current	265 ma
Two-Tone D-C Grid Current	87 ma
Peak Envelope Useful Output Power	445 watts
Resonant Load Impedance	2750 ohms
Intermodulation Distortion Products - 40 db or more below PEP level	

TYPICAL OPERATION (Minimum Distortion
Products at 1500 Volts Plate Voltage)

D-C Plate Voltage	1500 volts
Zero-Sig D-C Plate Current*	46 ma
Single-Tone D-C Plate Current	400 ma
Single-Tone D-C Grid Current	163 ma
Two-Tone D-C Plate Current	265 ma
Two-Tone D-C Grid Current	92 ma
Peak Envelope Useful Output Power	300 watts
Resonant Load Impedance	1620 ohms
Intermodulation Distortion Products - 37 db or more below PEP level	

AUDIO FREQUENCY AMPLIFIER
OR MODULATOR, CLASS-B

MAXIMUM RATINGS (PER TUBE)	
D-C PLATE VOLTAGE	3000 MAX. VOLTS
D-C PLATE CURRENT	0.400 MAX. AMP
PLATE DISSIPATION	400 MAX. WATTS
GRID DISSIPATION	20 MAX. WATTS

TYPICAL OPERATION (Sinusoidal Wave, Two
Tubes, Grid Driven)

D-C Plate Voltage	3000 volts
D-C Grid Voltage	0 volts
Zero-Sig D-C Plate Current*	200 ma
Max-Sig D-C Plate Current	666 ma
Max-Sig D-C Grid Current	240 ma
Driving Power	26 watts
Peak A-F Driving Voltage (per tube)	88 volts
Load Resistance, Plate-to-Plate	9500 ohms
Max-Sig Plate Output Power	1310 watts

*Approximate Value

**R-F POWER AMPLIFIER
OR OSCILLATOR, CLASS-C****TYPICAL OPERATION**

MAXIMUM RATINGS			
D-C PLATE VOLTAGE	4000 MAX. VOLTS	D-C Plate Voltage	3000 volts
D-C PLATE CURRENT	0.350 MAX. AMP	D-C Plate Current	333 ma
PLATE DISSIPATION	400 MAX. WATTS	D-C Grid Voltage	-75 volts
GRID DISSIPATION	20 MAX. WATTS	D-C Grid Current	130 ma
		Peak R-F Grid Voltage	187 volts
		Grid Driving Power	25 watts
		Plate Output Power	730 watts

**PLATE-MODULATED
R-F POWER AMPLIFIER****TYPICAL OPERATION**

MAXIMUM RATINGS			
D-C PLATE VOLTAGE	3000 MAX. VOLTS	D-C Plate Voltage	3000 volts
D-C PLATE CURRENT	0.275 MAX. AMP	D-C Plate Current	245 ma
PLATE DISSIPATION	270 MAX. WATTS	D-C Grid Voltage	-90 volts
GRID DISSIPATION	20 MAX. WATTS	D-C Grid Current	100 ma
		Peak R-F Grid Voltage	185 volts
		Grid Driving Power	18 watts
		Plate Output Power	550 watts

NOTE: In most cases, "TYPICAL OPERATION" data are obtained by calculation from published characteristic curves and confirmed by direct tests. No allowance for circuit losses, either input or output, has been made. Exceptions are distinguished by a listing of "Useful" output power as opposed to "Plate" output power. Values appearing in these groups have been obtained from existing equipment(s) and the output power is that measured at the load.

APPLICATION

Mounting -- The 3-400Z must be operated vertically, base up or base down. A flexible connecting strap should be provided between the heat dissipating plate connector and the external plate circuit. The tube must be protected from severe vibration and shock.

Cooling -- Forced-air cooling is required to maintain the base seals at a temperature below 200°C, and the plate seal at a temperature below 225°C. When using the Eimac SK-400 Air-System Socket and SK-416 Chimney, a minimum air flow rate of 15 cubic feet per minute at a static pressure of approximately 0.40 inch of water, as measured in the socket at sea level, is required to provide adequate cooling at an inlet air temperature of 25°C. At higher inlet air temperatures the air flow rate must be increased to give equivalent cooling. Cooling air must be supplied to the tube even when the filament alone is on during standby periods.

When a socket other than the SK-400 is used, provisions must be made for equivalent cooling of the base, the envelope, and the plate lead. In all cases, air flow rates in excess of the minimum requirements will prolong tube life.





Class-C Operation -- Although specifically designed for class-B service, the 3-400Z may be operated as a class-C power amplifier or oscillator or as a plate-modulated radio-frequency power amplifier. The zero-bias characteristic of the 3-400Z can be used to advantage in class-C amplifiers operating at plate voltages of 3000 volts or below by employing only grid-leak bias. If driving power fails, plate dissipation is then kept to a low value because the tube will be operating at the normal static zero-bias conditions.

Filament Operation -- The rated filament voltage for the 3-400Z is 5.0 volts. Filament voltage, as measured at the socket, must be maintained within the range of 4.75 to 5.25 volts to obtain maximum tube life.

Intermodulation Distortion -- Typical Operating conditions with distortion values included are the result of data taken during actual operation at 2 megacycles. Intermodulation values listed are those measured at the full peak envelope power noted. As the driving signal level is reduced, distortion products remain at the listed value, or better, below original peak envelope power level.

Input Circuit -- When the 3-400Z is operated as a grounded-grid r-f amplifier, the use of a resonant tank in the cathode circuit is recommended in order to obtain greatest linearity and power output. For best results with a single-ended amplifier it is suggested that the cathode tank circuit operate at a "Q" of five or more.

Special Applications -- If it is desired to operate this tube under conditions widely different from those given here, write to Power Grid Tube Marketing, Eitel-McCullough, Inc., 301 Industrial Way, San Carlos, California, for information and recommendations.

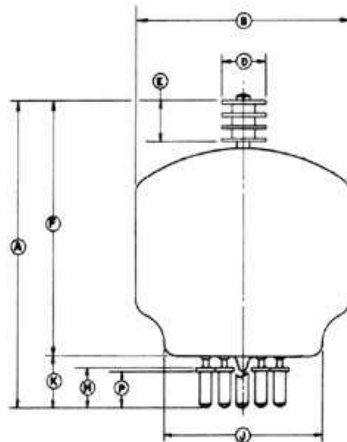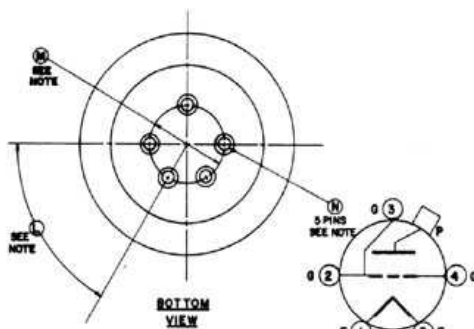

DIMENSIONS (IN INCHES)		
REF.	MIN.	MAX.
A	5 5/16	5 13/16
B		3 9/16 DIA.
D	.745 DIA.	.755 DIA.
E	.640	.680
F	4 1/2	5
H	9/16	11/16
J		2 1/2 DIA.
K		15/16
L		80° TYR.
M		1/4 DIA. P.C.
N	.185 DIA.	.191 DIA.
P	1/2	5/8

NOTE:
 BASE PINS (1) ARE SO ALIGNED THAT THEY CAN BE FREELY INSERTED INTO A GAUGE 1/4" THICK WITH HOLE DIAMETERS OF .204 LOCATED ON THE TRUE CENTERS BY THE GIVEN DIMENSIONS C & B

