



TECHNICAL DATA

7855
7855K

HIGH-MU
PLANAR TRIODE

The EIMAC 7855 and 7855K are ruggedized high-mu planar triodes of ceramic/metal construction, designed for grid pulsed, plate pulsed and CW operation in amplifiers, oscillators and frequency multipliers from low frequency to 3 GHz. The 7855 is supplied with a radiator for forced air cooling and the 7855K without radiator for conduction and convection cooling. Except for plate dissipation ratings, the characteristics of the two tubes are the same. In addition to the low interelectrode capacitances and high transconductance these tubes exhibit special design features such as a frequency stable anode and an arc resistant cathode to assure stable operation under adverse conditions and to minimize catastrophic failure due to arc over during a circuit malfunction.



7855K

7855

GENERAL CHARACTERISTICS¹

ELECTRICAL

Cathode: Oxide Coated, Unipotential

| | |
|--|-------------|
| Heater: Voltage | 6.0 ± 0.3 V |
| Current, at 6.0 volts | 1.00 A |
| Transconductance (Average): | |
| I _b = 70 mA | 25 mmhos |
| Amplification Factor (Average): | 80 |
| Direct Interelectrode Capacitances (Grounded Cathode) ² | |
| C _{in} | 6.8 pF |
| C _{out} | 0.04 pF |
| C _{gp} | 2.50 pF |
| Cut-off Bias ³ | -30 V max. |

1. Characteristics and operating values are based upon performance tests. These figures may change without notice as the result of additional data or product refinement. EIMAC Division of Varian should be consulted before using this information for final equipment design.
2. Capacitance values for a cold tube as measured in a special shielded fixture in accordance with Electronic Industries Association Standard RS-191.
3. Measured with one milliampere plate current and a plate voltage of 1 kVdc.

MECHANICAL

Maximum Overall Dimensions:

| | |
|--------------------------|-------------------|
| Length | 2.39 in; 60.60 mm |
| Diameter | 1.27 in; 32.20 mm |
| Net Weight (7855) | 57 gm |
| (7855K) | 40 gm |
| Operating Position | Any |

(Effective 8-1-71) © by Varian

Printed in U.S.A.

Maximum Operating Temperature:

| | |
|-------------------------------|------------------------|
| Ceramic/Metal Seals | 250°C |
| Anode Core | 250°C |
| Cooling (7855) | Forced air |
| (7855K) | Conduction, convection |
| Terminals | Coaxial, special |

ENVIRONMENTAL

| | |
|--|------------|
| Shock, 11 ms, non-operating | 60 G |
| Vibration, operating, all axes 55 to 500 Hz | 10 G |
| Altitude, max (in a suitably designed circuit) | 50,000 ft. |

GRID PULSED OR PLATE PULSED AMPLIFIER OR OSCILLATOR

MAXIMUM RATINGS/ABSOLUTE VALUES

| | |
|---|---------------|
| DC PLATE VOLTAGE (grid pulsed) | 2500 VOLTS |
| PEAK PULSE PLATE VOLTAGE (plate pulsed) | 3500 VOLTS |
| DC GRID VOLTAGE | -150 VOLTS |
| INSTANTANEOUS PEAK GRID CATHODE VOLTAGE | |
| Grid negative to cathode | -700 VOLTS |
| Grid positive to cathode | 250 VOLTS |
| PULSE PLATE CURRENT | 3.0 AMPERES |
| PULSE GRID CURRENT | 1.8 AMPERES |
| PLATE DISSIPATION (7855) | 100 WATTS |
| (7855K) | 10 WATTS |
| GRID DISSIPATION | 2.0 WATTS |
| FREQUENCY | 3.0 GIGAHERTZ |
| PULSE DURATION ¹ | 6 μ sec |
| DUTY FACTOR ¹ | .0033 |

TYPICAL OPERATION Grid Pulsed Oscillator, Representative Application

| | |
|---|-------------|
| Plate Voltage | 2000 Vdc |
| Grid Voltage | -75 Vdc |
| Heater Voltage | 5.7 V |
| Peak Video Plate Current | 1.3 a |
| Peak Video Grid Current | 0.8 a |
| Useful Power Output (approx.) | 750 w |
| Frequency | 1.090 GHz |
| Pulse Duration | 0.5 μ s |
| Duty Factor | .001 |

PULSE MODULATOR OR PULSE AMPLIFIER SERVICE

MAXIMUM RATINGS/ABSOLUTE VALUES

| | |
|---|-------------|
| DC PLATE VOLTAGE | 2500 VOLTS |
| PEAK PLATE VOLTAGE | 3500 VOLTS |
| DC GRID VOLTAGE | -150 VOLTS |
| INSTANTANEOUS PEAK GRID-CATHODE VOLTAGE | |
| Grid negative to cathode | -750 VOLTS |
| Grid positive to cathode | 150 VOLTS |
| PULSE CATHODE CURRENT | 4.8 AMPERES |

| | |
|---------------------------------------|------------------|
| DC PLATE CURRENT | 100 MILLIAMPERES |
| PLATE DISSIPATION (7855) | 100 WATTS |
| (7855K) | 10 WATTS |
| GRID DISSIPATION | 1.5 WATTS |
| PULSE DURATION ¹ | 6 μ s |
| DUTY FACTOR ¹ | .0033 |
| CUT-OFF MU | 60 |

1. For application requiring longer pulse duration and/or higher duty cycle consult the nearest Varian Electron Tube and Device Field Office, or the Product Manager Eimac-Division of Varian, Salt Lake City, Utah.

RANGE VALUES FOR EQUIPMENT DESIGN

| | <u>Min.</u> | <u>Max.</u> |
|--|-------------|-------------|
| Heater: Current at 6.0 volts | 0.90 | 1.05 A |
| Cathode Heating Time | 60 | --- sec. |
| Interelectrode Capacitances ¹ (grounded cathode connection) | | |
| C _{in} | 6.00 | 7.50 pF |
| C _{out} | --- | 0.04 pF |
| C _{gp} | 2.35 | 2.65 pF |


1. Capacitance values for a cold tube as measured in a special shielded fixture. When the cathode is heated to the proper temperature, the grid-cathode capacitance will increase from the cold value by approximately 1 pF due to thermal expansion of the cathode.

APPLICATION

For operating information refer to EIMAC bulletin #15, "Operating Instruction for Planar Triodes."

| ELECTRODE CONTACT DIMS. (see note 7) | | | | |
|--------------------------------------|-------|------|-----------------|-------|
| Dim. in Inches | | Dim. | Dim. in Millim. | |
| Min. | Max. | | Min. | Max. |
| .035 | .361 | AA | .89 | 9.17 |
| 1.021 | 1.101 | AB | 25.93 | 27.97 |
| 1.219 | 1.413 | AC | 30.96 | 35.89 |
| 1.160 | 1.500 | AD | 29.46 | 38.10 |

| DIMENSIONAL DATA | | | | |
|------------------|-------|------|---------------------|-------|
| Dim. in Inches | | Dim. | Dim. in Millimeters | |
| Min. | Max. | | MIN. | MAX. |
| 1.500 | 1.560 | A | 38.10 | 39.62 |
| | 1.214 | B | | 30.84 |
| 1.125 | 1.165 | D | 28.58 | 29.59 |
| .800 | .840 | F | 20.32 | 21.34 |
| .462 | .477 | G | 11.73 | 12.12 |
| | .040 | H | | 1.02 |
| .125 | .185 | I | 3.18 | 4.70 |
| .766 | .826 | J | 19.46 | 20.98 |
| .025 | .046 | K | .64 | 1.17 |
| 1.234 | 1.264 | L | 31.34 | 32.11 |
| 1.180 | 1.195 | M | 29.97 | 30.35 |
| 1.025 | 1.035 | N | 26.04 | 26.29 |
| .752 | .792 | P | 19.10 | 20.12 |
| .655 | .665 | R | 16.64 | 16.89 |
| .213 | .223 | T | 5.41 | 5.66 |
| .315 | .325 | U | 8.00 | 8.26 |
| | .086 | V | | 2.18 |
| | .100 | W | | 2.54 |
| .105 | .145 | Y | 2.67 | 3.68 |
| .650 | .850 | Z | 16.51 | 21.59 |

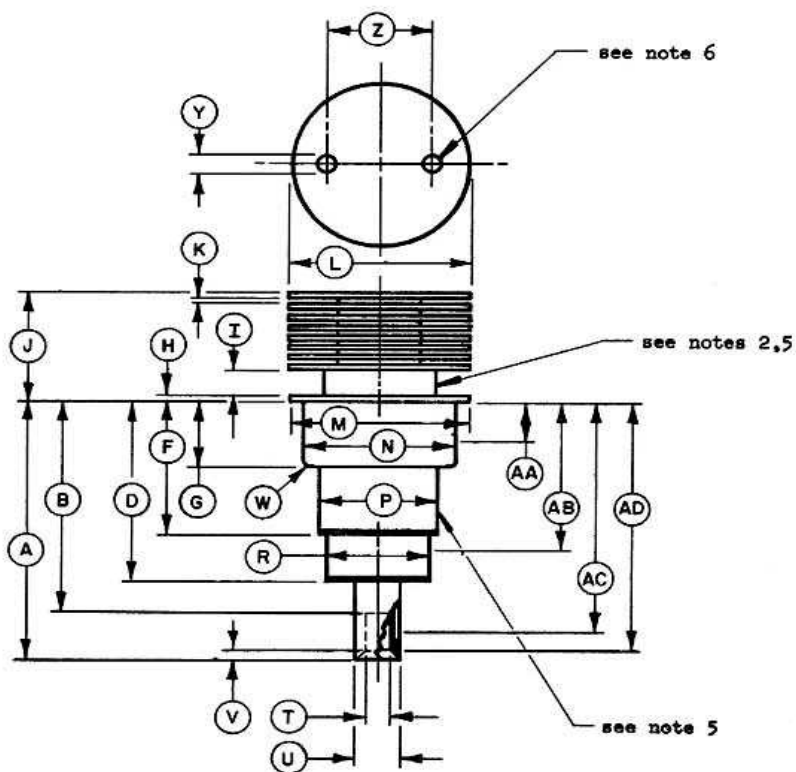


7855

NOTES:

1. Metric equivalents, to the nearest .01 mm, are given for general information only & are based on 1 inch = 25.4 mm.
2. This surface to be used to measure anode shank temperature.
3. Eccentricity of contact surfaces shall be gaged from center line of reference & shall be as follows:

| Contact Surface | TIR Max. | Reference |
|-----------------|----------|-----------|
| Anode | .020 | Cathode |
| Grid | .020 | Cathode |
| Heater | .012 | Cathode |
4. Dias. N,R,T & U shall apply throughout entire length as defined by dims. AA,AB,AC,AD respectively.
5. This surface shall not be used for clamping or locating.
6. Holes for extractor thru top fin only.
7. Electrode Contact dims. are for socket design purposes & are not intended for inspection purposes.

| ELECTRODE CONTACT AREA (see note 6) | | | | | DIMENSIONAL DATA | | | | |
|-------------------------------------|-------|------|----------------|-------|------------------|-------|---------------------|-------|-------|
| Dim. in Millimeters | | Dim. | Dim. in Inches | | Dim. in Inches | | Dim. in Millimetres | | |
| Min. | Max. | | Min. | Max. | Min. | Max. | Dim. | MIN. | MAX. |
| .89 | 9.17 | AA | .035 | .361 | 1.500 | 1.560 | A | 38.10 | 39.62 |
| 25.93 | 27.97 | AB | 1.021 | 1.101 | | 1.215 | B | | 30.84 |
| 30.96 | 35.89 | AC | 1.219 | 1.413 | 1.125 | 1.165 | D | 28.58 | 29.59 |
| 29.46 | 38.10 | AD | 1.160 | 1.500 | .800 | .840 | F | 20.32 | 21.34 |
| | | | | | .462 | .477 | G | 11.73 | 12.12 |
| | | | | | | .040 | H | | 1.02 |
| | | | | | | .185 | I | | 4.70 |
| | | | | | .766 | .826 | J | 19.46 | 20.98 |
| | | | | | .025 | .046 | K | .64 | 1.17 |
| | | | | | 1.234 | 1.264 | L | 31.34 | 32.11 |
| | | | | | 1.180 | 1.195 | M | 29.97 | 30.35 |
| | | | | | 1.025 | 1.035 | N | 26.04 | 26.29 |
| | | | | | .752 | .792 | P | 19.10 | 20.12 |
| | | | | | .655 | .665 | R | 16.64 | 16.89 |
| | | | | | .213 | .223 | T | 5.41 | 5.66 |
| | | | | | .315 | .325 | U | 8.00 | 8.26 |
| | | | | | | .086 | V | | 2.18 |
| | | | | | | .100 | W | | 2.54 |
| | | | | | .840 | .860 | LA | 21.34 | 21.84 |
| | | | | | .427 | .447 | ZA | 10.85 | 11.35 |

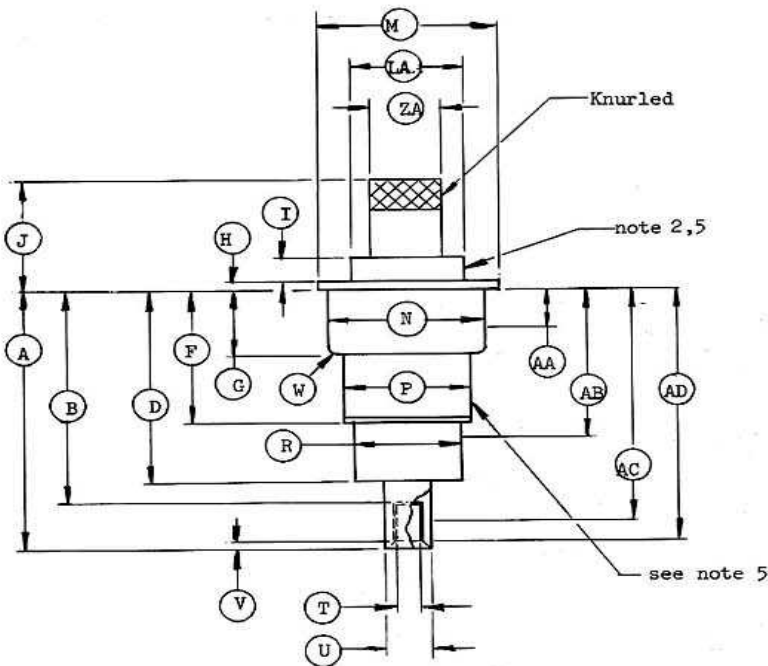

7855K

NOTES:

- Metric equivalents to the nearest .01mm, are given for general information only & are based on 1 inch= 25.4 mm.
- This surface shall be used to measure Anode shank temperature.
- Eccentricity of contact surfaces shall be gaged from center line of reference & shall be as follows:

| Contact Surface | TIR Max. | Reference |
|-----------------|----------|-----------|
| Anode | .020 | Cathode |
| Grid | .020 | Cathode |
| Heater | .012 | Cathode |

- Dias. N,R,T,U shall apply throughout entire length as defined by dims. AA,AB,AC,AD respectively.
- This surface shall not be used for clamping or locating.
- Electrode Contact Dims. are intended for socket design only & are not intended for inspection purposes.

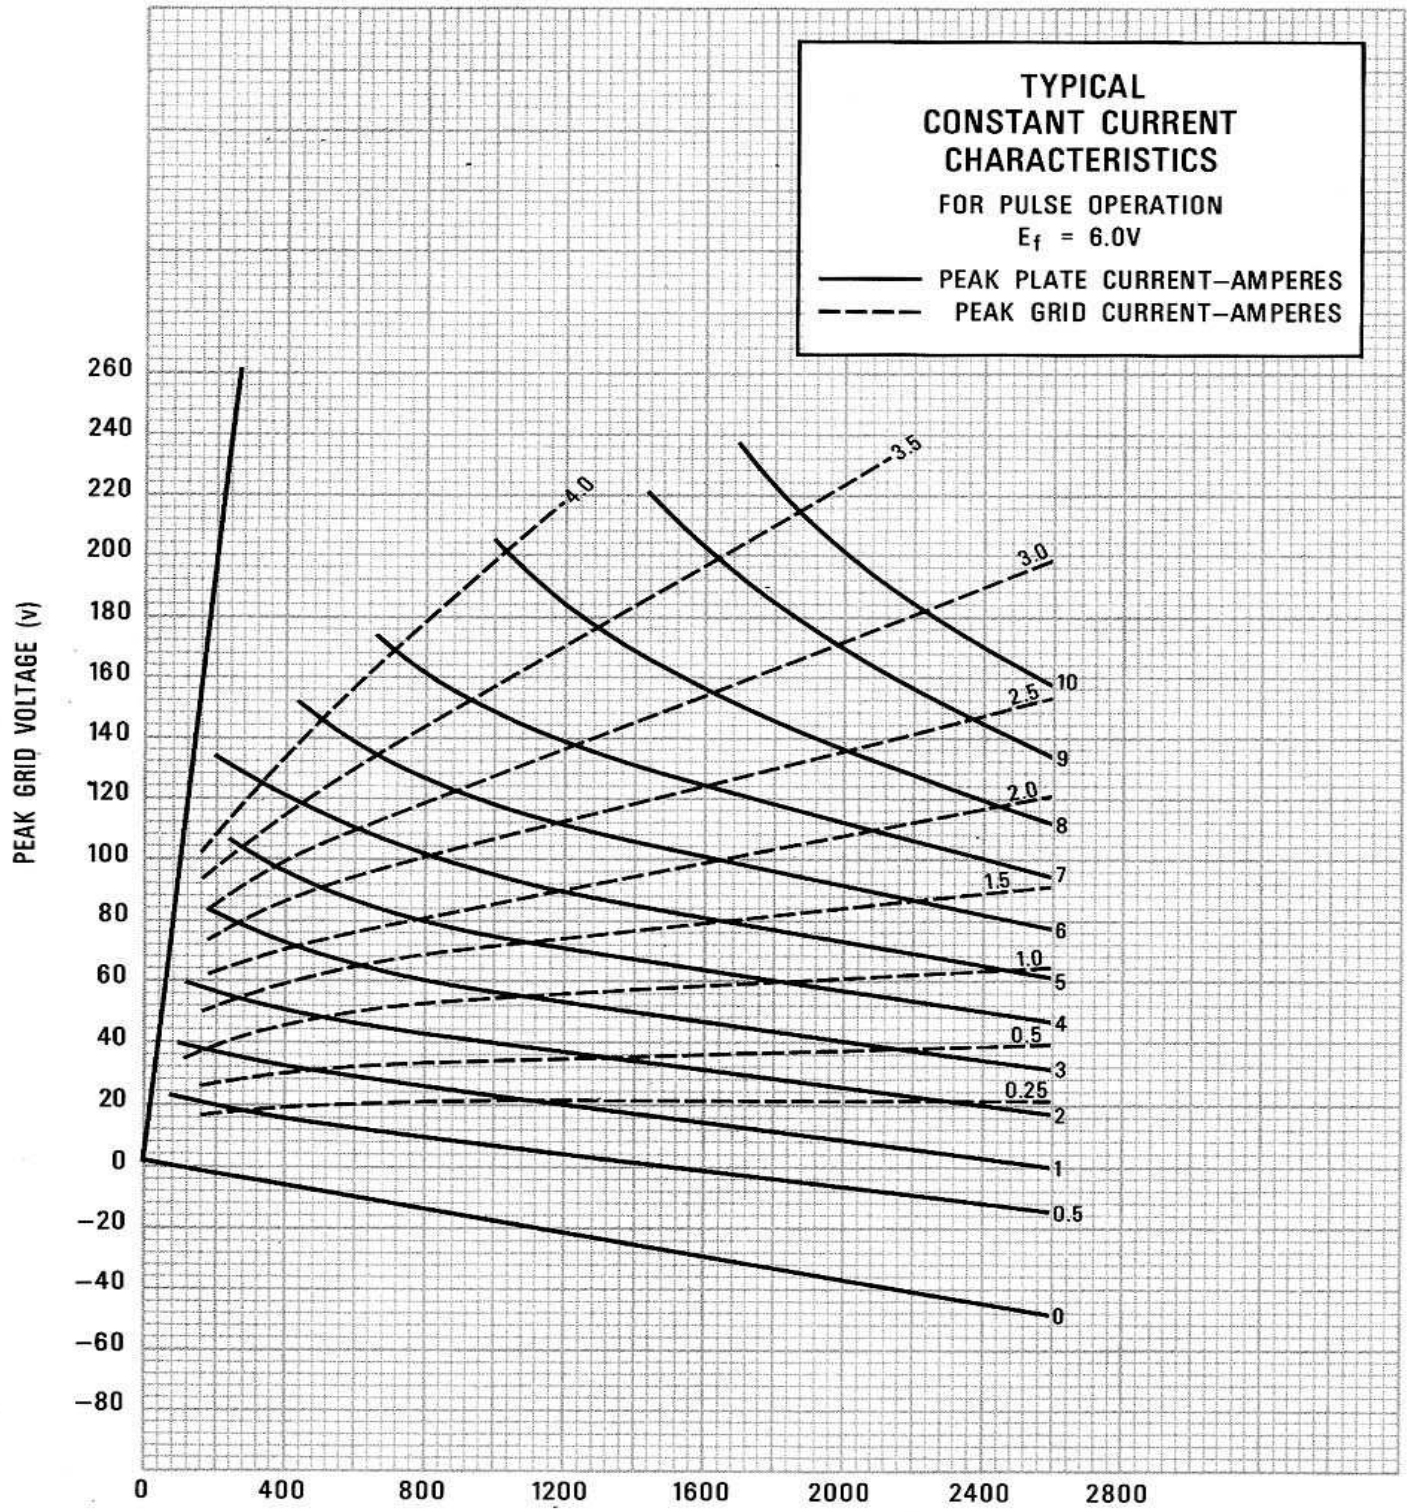


PLATE VOLTAGE (V)

CURVE #MA-2376

