



**EIMAC**  
 A Division of Varian Associates  
 SAN CARLOS, CALIFORNIA

*Tentative Data*

**EM1010**

**TRAVELING WAVE TUBE**

**4.0 to 8.0 GHz**  
**1 Watt Min.**  
**60 db Gain**

**TENTATIVE DATA FOR EIMAC EM1010 TRAVELING WAVE TUBE**

The EIMAC EM1010 is a very rugged, light weight power-amplifier traveling wave tube designed to operate under severe environmental extremes of shock, vibration, altitude and temperature. The EM1010 utilizes ceramic and metal construction and is focused by a fully temperature-compensated periodic permanent magnet array. This tube will provide a minimum output power of 1 watt CW over the frequency range of 4.0 to 8.0 GHz with a nominal small signal gain of 60 db.



The integral heat sink/mounting flange allows operation to ambient temperatures of +85°C without additional cooling. Flexible leads provide electrical connections to the tube.

**GENERAL CHARACTERISTICS**

**ELECTRICAL**

Cathode: Unipotential, oxide coated		
Minimum Heating Time	- - - - -	60 seconds
Heater: Voltage	- - - - -	6.3 volts
Current	- - - - -	0.6 amperes
Noise Figure	- - - - -	25 to 34 decibels
Minimum Saturated Output Power	- - - - -	1 watt
Frequency Range	- - - - -	4.0 to 8.0 gigahertz
Input and Output Impedence	- - - - -	50 ohms nominal

**MECHANICAL**

Operating Position	- - - - -	Any
RF Input Coupling	- - - - -	Type N Female Coaxial Fitting
RF Output Coupling	- - - - -	Type N Female Coaxial Fitting
Focusing	- - - - -	Periodic Permanent Magnet
Cooling	- - - - -	Passive Heat Sink
Maximum Overall Dimensions	- - - - -	See Outline Drawing
Net Weight (Including Magnets)	- - - - -	4.5 Pounds

**MAXIMUM RATINGS**

DC Beam Voltage*	- - - - -	2600 volts
DC Focus Electrode Voltage*:		
Negative with respect to Cathode	- - - - -	40 volts
DC Cathode Current	- - - - -	30 milliamperes



**TYPICAL OPERATING CHARACTERISTICS**

Frequency	- - - - -	4.0 to 8.0 gigahertz
Minimum Output Power	- - - - -	1.0 watt
Small Signal Gain	- - - - -	60 decibels
DC Beam Voltage*	- - - - -	2550 volts
DC Cathode Current	- - - - -	28 milliamperes
DC Focus Electrode Voltage*	- - - - -	-30 volts
DC Focus Electrode Current	- - - - -	0 milliamperes

\*All voltages referred to cathode.

**APPLICATION**

*Cooling:* The EM1010 is designed to be heat sink cooled by means of the mounting available and integral with the tube and PPM structure. Under environmental conditions normally encountered in military equipments, additional cooling will not be required.

*Cathode:* The heater voltage should be maintained within  $\pm 5$  per cent of the rated value of 6.3 volts if variations in performance are to be minimized and best tube life obtained.

*Helix:* The helix, collector and anode are internally connected to the tube body and are operated at the same potential. Therefore, it is often convenient to operate these elements at chassis potential, with the cathode and focus electrode at appropriate negative potentials. The cathode potential should be maintained within  $\pm 1$  per cent to insure proper operation.

*Focus Electrode:* The focus electrode power supply must be regulated within  $\pm 2$  per cent to minimize variations in performance.

*Special Applications:* For any additional information concerning this tube or its application, write to Microwave Product Manager, EIMAC, Division of Varian, 301 Industrial Way, San Carlos, Calif.

**ENVIRONMENTAL**

The EM1010 conforms generally with MIL-E-5272C, "Environmental Testing, Aeronautical and Associated Equipment, General Specification for," and MIL-E-5400, "Electronic Equipment, Aircraft, General Specification for," Class II.

Vibration	- - - - -	10 g to 2000 Hz (Curve A of Proc. XII, MIL-E-5272C)
Shock	- - - - -	25 g, 11 $\pm 1$ ms
Acceleration	- - - - -	Sustained, 25 g's
Temperature	- - - - -	-54°C to +85°C
Altitude	- - - - -	70,000 ft.







*Note:* This data should not be used for final equipment design.



### EM-1010 TYPICAL OPERATING CHARACTERISTICS

ANODE VOLTAGE  $\frac{2550}{28}$  Vdc  
CATHODE CURRENT mAdc

FOCUS VOLTAGE  $\frac{-30}{6.3}$  Vdc  
FILAMENT VOLTAGE V

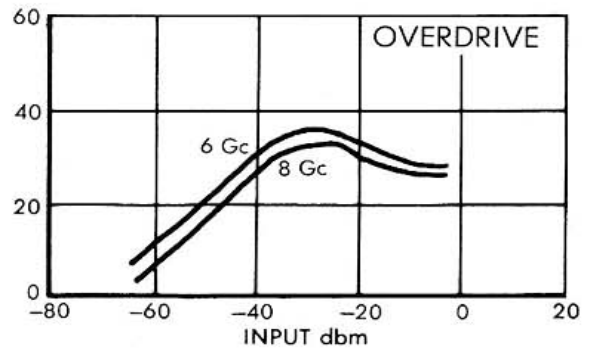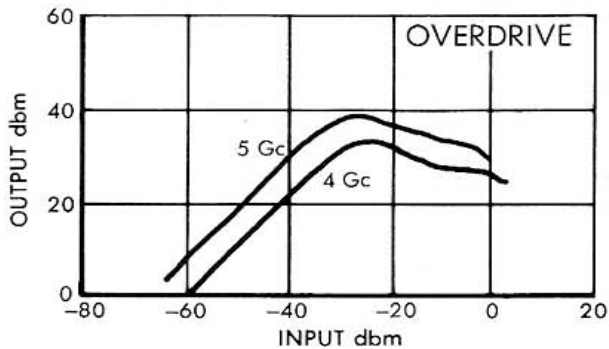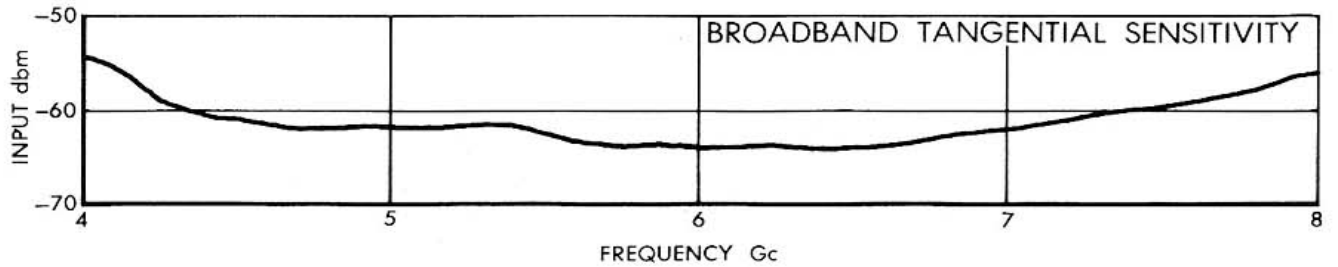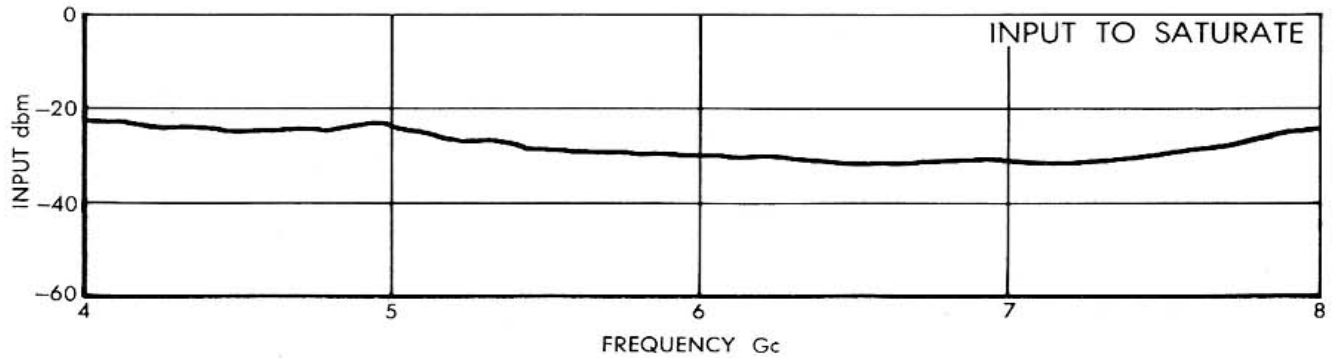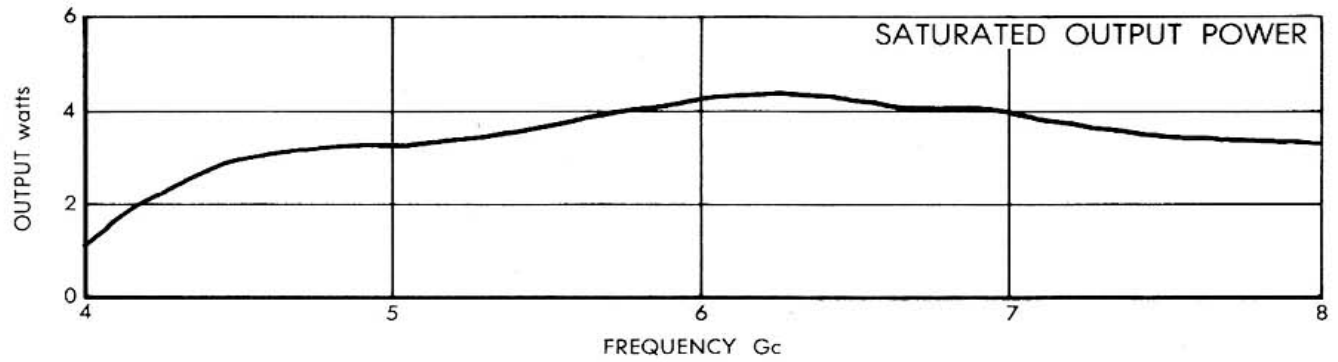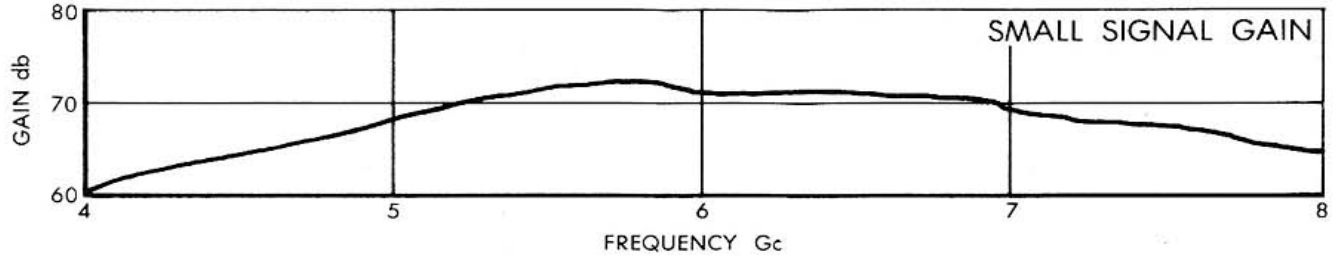



EM-1010

# EM-1010

## CONNECTIONS

- 1. HEATER — BROWN
- 2. CATHODE HEATER — YELLOW
- 3. FOCUS ELECTRODE — GREEN
- 4. BODY GROUND — BLACK

