


FEDERAL

F-369-B HALF WAVE RECTIFIER

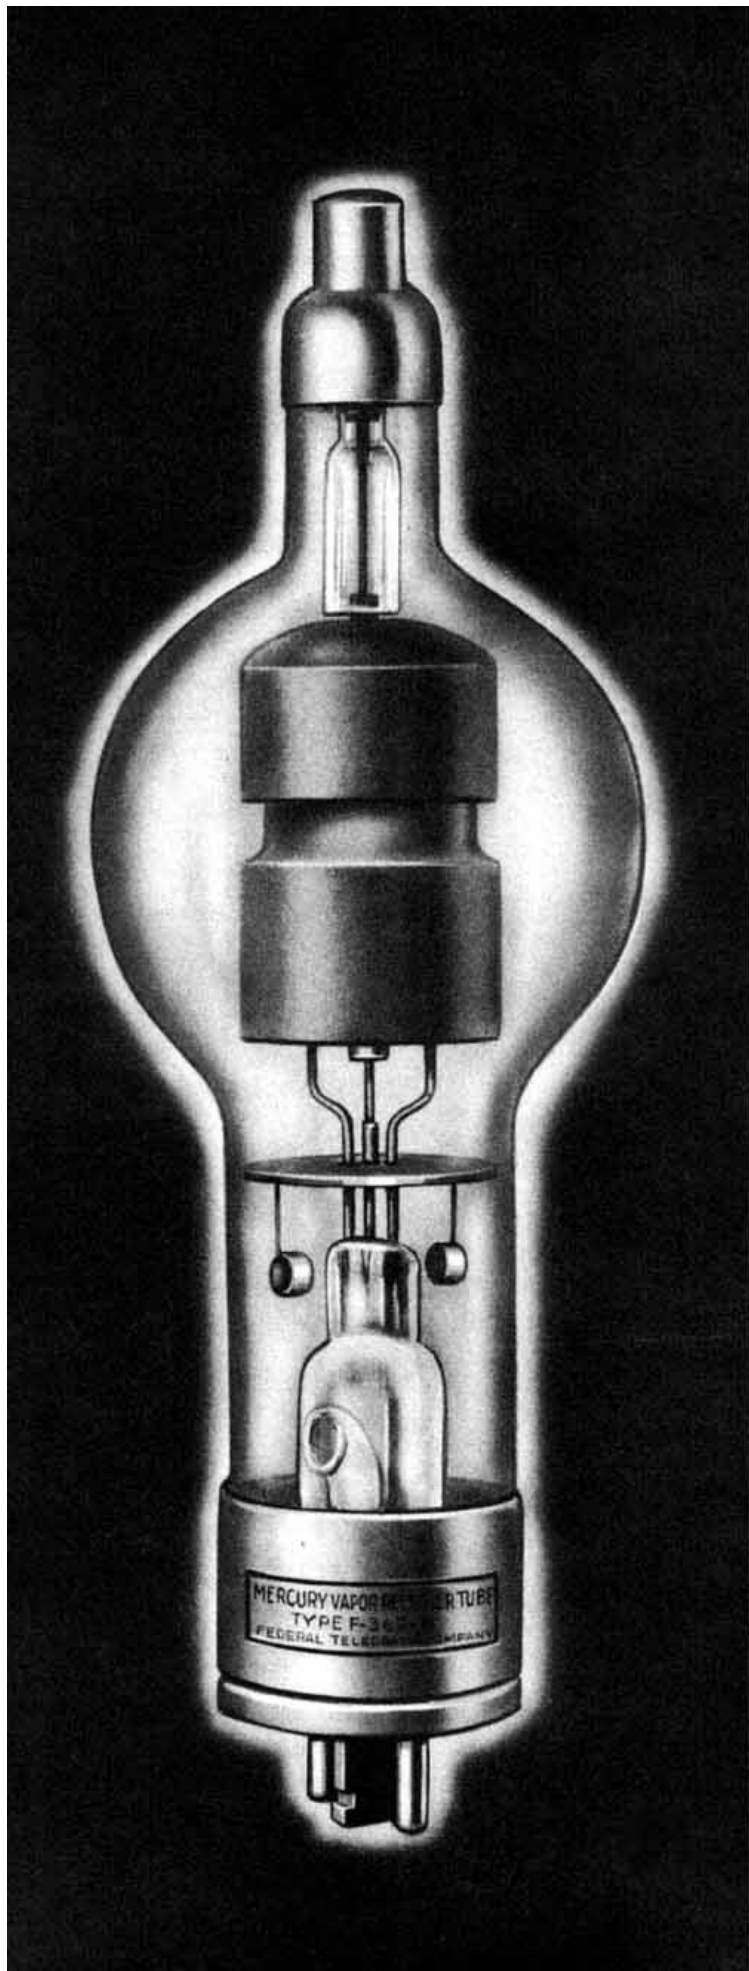

TECHNICAL DATA

No. of Electrodes	2
Filament Voltage	5 volts
Current	20 amperes
Heating Time	60 seconds
Maximum Average Current	2.5 amperes
Maximum Peak Current	10 amperes
Maximum Peak Inverse Voltage	20,000 volts— Ambient Temperature 30°—45°C. 16,000 volts— Ambient Temperature 15°—50°C.
Overall Dimensions	
Maximum Length	14 ³ / ₈ inches
Minimum Length	14 ¹ / ₈ inches
Maximum Diameter	5-1/16 inches
Type Base and Cap	Standard
Mounting	Standard or Federal Type 1004-A
Recommended Operating Ambient Temperature Range	15°—50°C.


The information herein by no means represents exact conditions of operation to be imposed for any particular situation. Since tubes are used under many widely different conditions the manufacturer will gladly furnish information regarding characteristics for design purposes.

Manufactured by

FEDERAL TELEGRAPH CO.

200 Mt. Pleasant Avenue Newark, N. J., U. S. A.

F-369-B HALF WAVE RECTIFIER

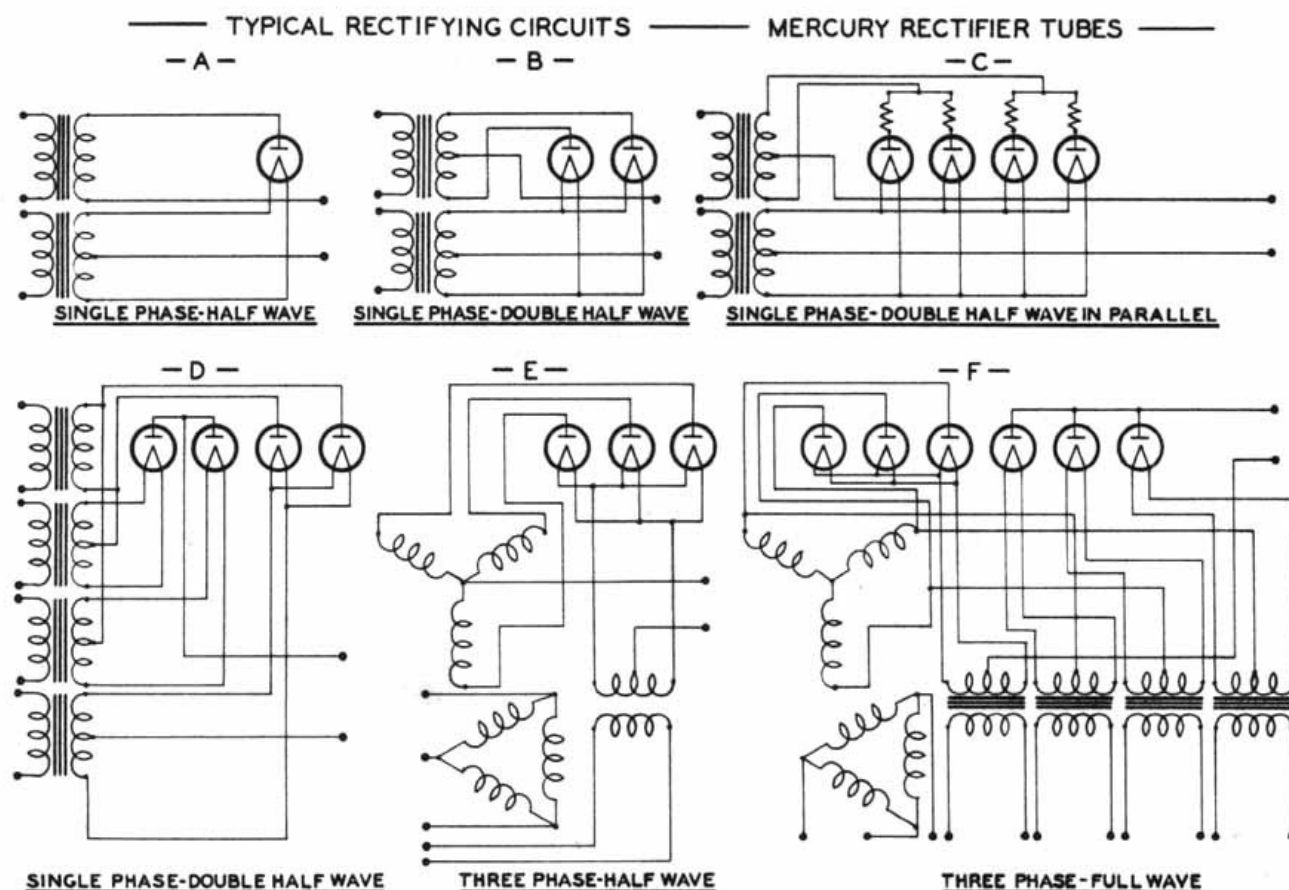

Typical rectifying circuits in which Type F-369-B may be employed are illustrated above. The approximate D.C. output current and voltage for each type of rectifying circuit shown, when tubes are operated at maximum permissible space current and inverse voltages, are given in the following table:

<i>Circuit</i>	<i>No. of Tubes</i>	<i>Input Voltage R.M.S.</i>	<i>Approx. D.C. Output Volts</i>	<i>Amperes</i>
A	1	14,000 per tube	6300	2.5
B	2	7,000 per tube	6300	5.0
C	4	7,000 per tube	6300	10.0
D	4	14,000 per 2 tubes	12500	5.0
E	3	8,250 per leg	9500	7.5
F	6	8,250 per leg	19200	7.5

The above values are for rectifiers working into filters the input inductance of which is sufficient to maintain the output current substantially constant. Pure sine waveform of the power source is assumed. Transformer regulation and voltage drops in tubes and filter are neglected.