

Federal Telephone and Radio Corporation



VACUUM TUBE PRODUCTS • NEWARK 1, NEW JERSEY



TYPE 7C26

High Vacuum Triode, Power Amplifier, Oscillator

General Characteristics

Electrical

Filament Type	Thoriated Tungsten
Filament Voltage	9.0 volts
Filament Current	28.0 amperes
Average characteristics at $E_b=2000$ volts, $I_b=0.5$ amperes	
Mutual Conductance	20,000 umhos
Amplification Factor	17
Direct Inter-electrode Capacitances	
Grid-Plate	10.0 uuf
Grid-Filament	11.0 uuf
Plate-Filament	1.0 uuf
Frequency for Maximum Ratings	150 mc

Mechanical

Type of Cooling	Forced-air
Minimum Flow	75 CFM
Maximum Overall Dimensions	
Length	4.375 inches
Diameter	2.55 inches
Connections	See outline drawing
Mounting Position	Vertical



Maximum Ratings and Typical Operation Class C R-F Power Amplifier and Oscillator (No Amplitude Modulation)

	<u>Typical Operation</u>	<u>Maximum Rating</u>	
D-C Plate Voltage	3,000	3,000	volts
D-C Plate Current	0.75	1.0	amperes
D-C Grid Voltage	-800	-800	volts
D-C Grid Current	0.100	0.100	amperes
Plate Input	2,250	3,000	watts
Plate Dissipation	680	1,000	watts
Power Output	1,570		watts
Frequency	110	150	mc

Federal Telephone and Radio Corporation



VACUUM TUBE PRODUCTS - NEWARK 1, NEW JERSEY

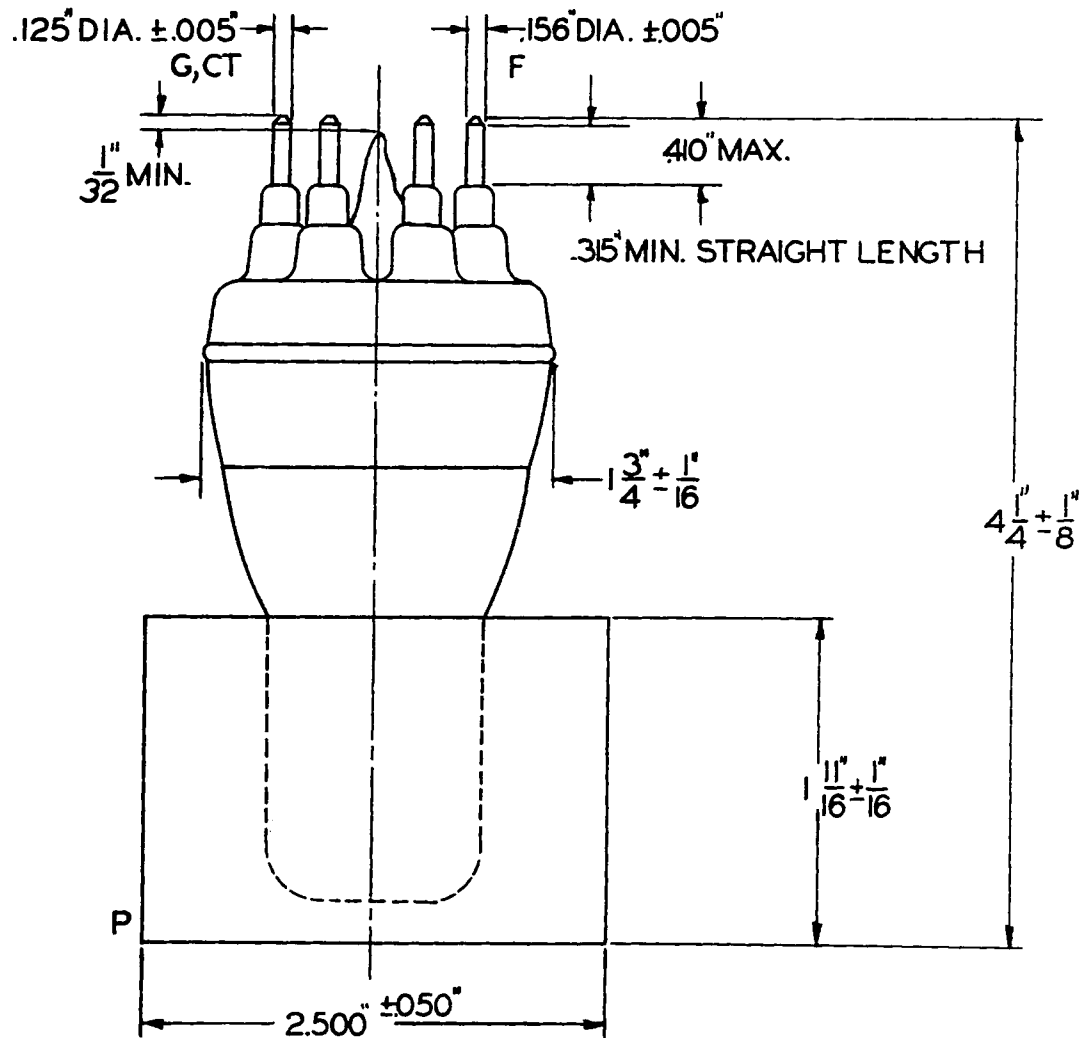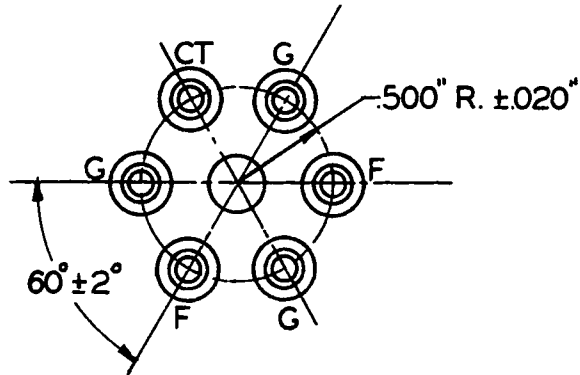

7C26