

Federal Telephone and Radio Corporation



100 KINGSLAND ROAD • CLIFTON, NEW JERSEY



TYPE 7C27

High Vacuum Triode, Power Amplifier, Oscillator

General Characteristics

Electrical

Filament Type	Thoriated Tungsten
Filament Voltage	16.0 volts
Filament Current	28.5 amperes
Amplification Factor	27
Direct Inter-electrode Capacitances	
Grid-Plate	14.0 uuf
Grid-Filament	14.0 uuf
Plate-Filament	0.4 uuf
Frequency for Maximum Ratings	110 mc

Mechanical

Type of Cooling	Forced-air
Minimum Flow	175 CFM
Minimum Pressure	2.5 inches of water
Maximum Overall Dimensions	
Length	8-1/32 inches
Diameter	3.532 inches
Connections	See outline drawing
Mounting Position	Vertical, anode down
Direction of Air Flow	Up

Maximum Ratings and Typical Operation

Class C R-F Power Amplifier and Oscillator
(No Amplitude Modulation)

	<u>Typical Operation</u>	<u>Maximum Rating</u>	
D-C Plate Voltage	4,000*	4,000	Volts
D-C Plate Current	1.5	2.0	amperes
D-C Grid Voltage	-600	-1,000	volts
D-C Grid Current	0.200	0.200	amperes
Plate Input	6,000	8,000	watts
Plate Dissipation	2,350	3,000	watts
Power Output	5,150		watts
Frequency	108	110	mc

* In push-pull grounded-grid amplifier with 3 Kw driver. All values are for one tube.



MAXIMUM ECCENTRICITY
OF GRID TERMINAL RING
WITH RESPECT TO
RADIATOR 3/92

7C27


Federal Telephone and Radio Corporation



100 KINGSLAND ROAD • CLIFTON, NEW JERSEY



DATA- AVERAGE GRID CHARACTERISTICS TYPE - 7C27

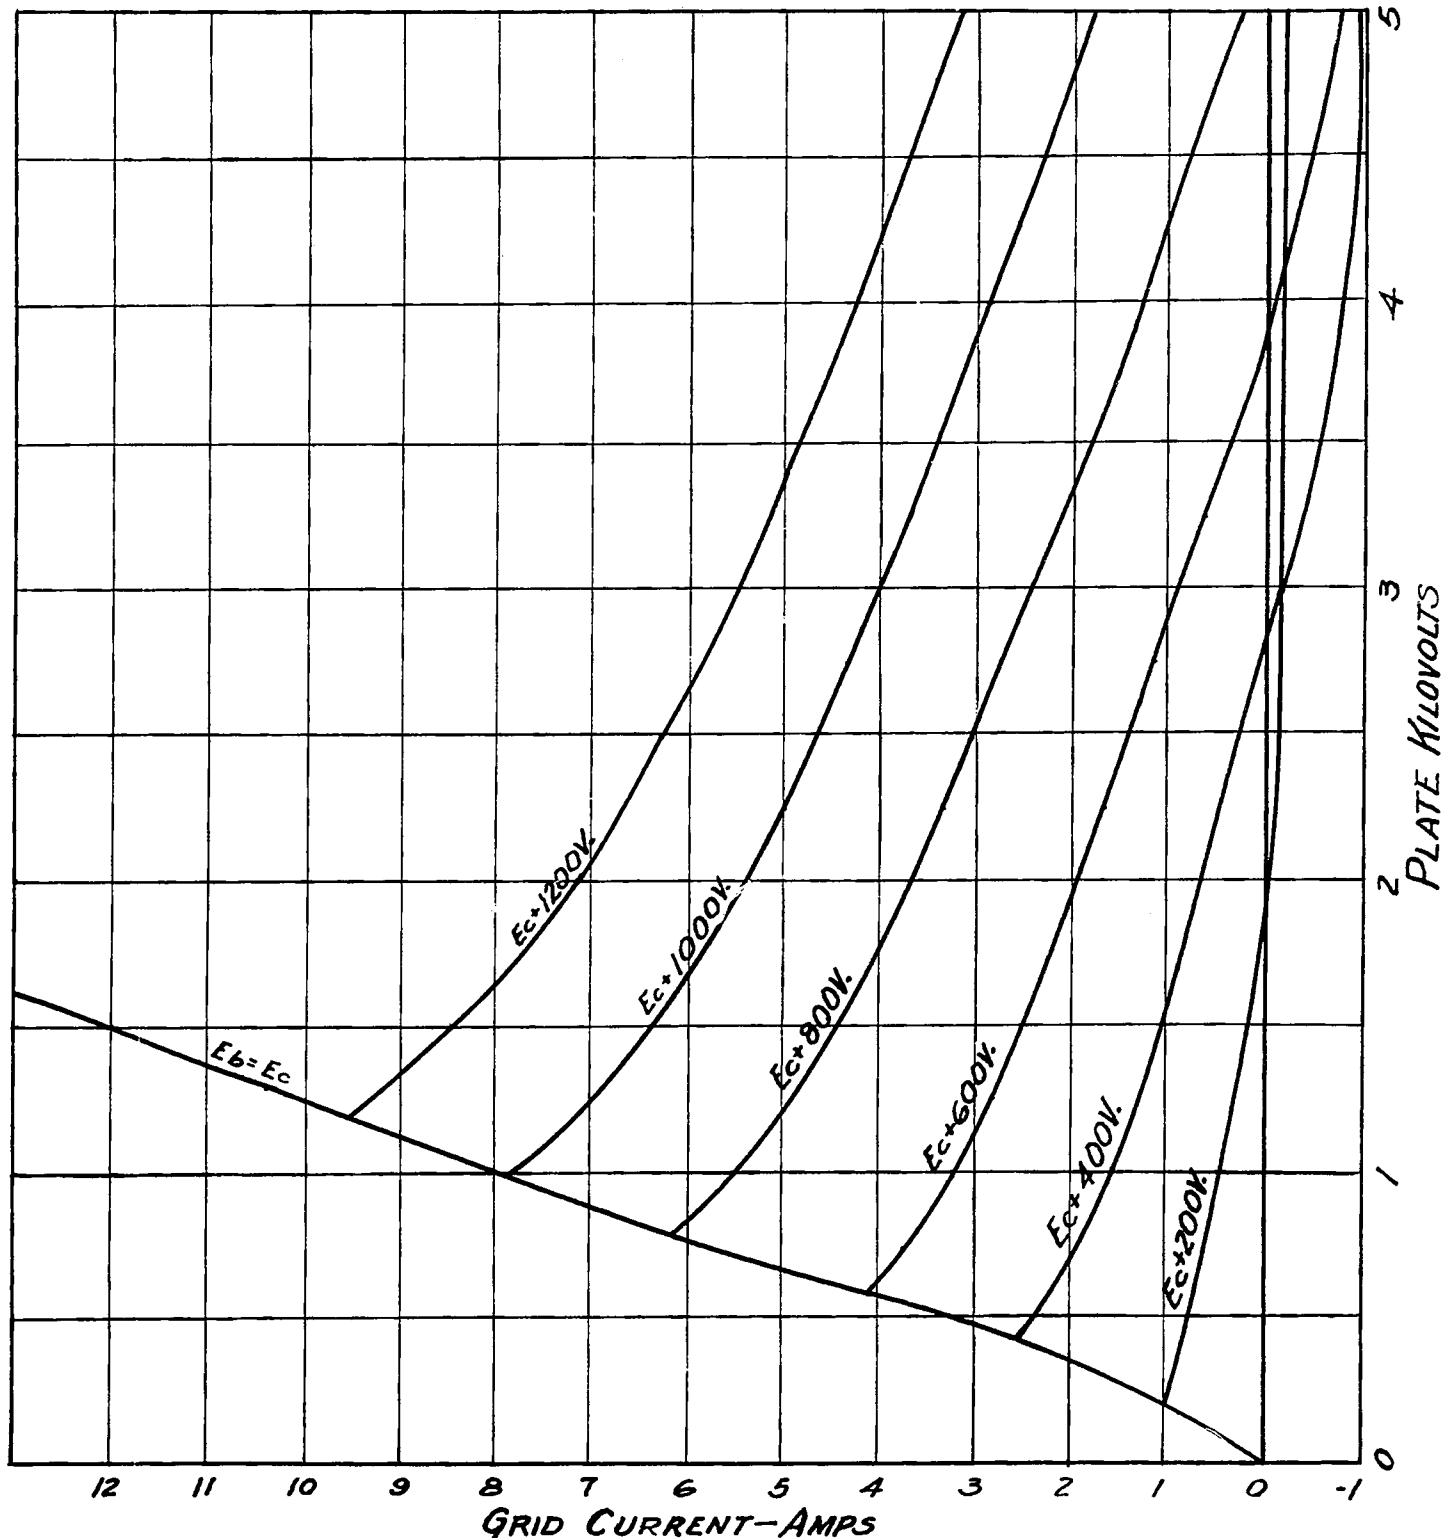

Federal Telephone and Radio Corporation



100 KINGSLAND ROAD • CLIFTON, NEW JERSEY



DATA-TYPE 7C27 AVERAGE PLATE CHARACTERISTICS

