



varian associates of canada ltd.

TECHNICAL DATA

VRQ-2100A

Series


Reflex Klystron

33-43 GHz

150 mW

DESCRIPTION

VRQ-2100A reflex klystrons are compact, rugged oscillators for airborne equipment or other applications requiring good frequency stability under adverse environmental conditions. Each tube delivers at least 150 milliwatts into a matched load over a tuning range of 4 gigahertz between 33 and 43 gigahertz. Tuning is achieved by means of a simple single-screw tuner. The base and leads are molded to the tube to permit reliable high-altitude operation without pressurization.

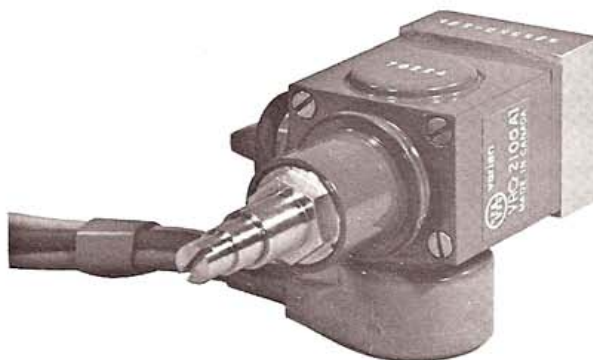

MAXIMUM RATINGS¹

Resonator Voltage ²	2550 Vdc
Resonator Current	27 mAdc
Resonator Power	65 W
Reflector Voltage ³	-900 Vdc
Heater Voltage	6.5 V
Body Surface Temperature ⁴	120 °C

GENERAL CHARACTERISTICS⁵

ELECTRICAL

Frequency Coverage ^{2,6}	33 to 43 GHz
Mechanical Tuning Range	±2 GHz
Output Power, minimum ⁷	150 mW
Heater Voltage	6.3 ± 0.2 V
Heater Current, typical	0.76 A

PHYSICAL

Dimensions	See Outline Drawing
Weight, approximate	14 oz
Mounting Position	Any
Cathode	Impregnated, Unipotential
Cooling ⁴	Forced Air or Conduction
R-F Output ⁸	Mates with VAE-2000 Series Adapters and Heat Sinks
Base	Molded Flexible Leads

TYPICAL OPERATING CONDITIONS⁵

Frequency ⁶	37 GHz
Mechanical Tuning Range	±2 GHz
Output Power, matched load ⁷	200 mW
Resonator Voltage ²	2500 Vdc
Resonator Current	23 mAdc
Reflector Voltage ³	-420 Vdc
Electronic Tuning Range ⁹	80 MHz
Reflector Modulation Sensitivity ¹⁰	3 MHz/V
Frequency/Temperature Coefficient ¹¹	-1 MHz/°C

RANGE VALUES FOR EQUIPMENT DESIGN^{1,2}

	Min	Max
Resonator Voltage ²	---	2550 Vdc
Resonator Current	---	27 mAdc
Reflector Voltage ³	-100	-800 Vdc
Electronic Tuning Range ⁹	70	---
Reflector Modulation Sensitivity ¹⁰	2	5 MHz/V
Frequency/Temperature Coefficient ¹¹	---	±1.4 MHz/°C
Heater Current, at 6.3 V	0.6	0.9 A

VRQ-2100A

NOTES:

1. Ratings should not be exceeded under continuous or transient conditions. A single rating may be the limitation and simultaneous operation at more than one rating may not be possible. Equipment design should limit voltage and environmental variations so that the ratings will never be exceeded.
2. Frequency increases as resonator voltage decreases. Hence, if operation at other than 2500 volts is contemplated, please specify desired resonator voltage when ordering.
3. Reflector must always be at least 20 volts negative with respect to the cathode.
4. Sufficient forced-air flow or conduction cooling must be supplied to maintain the body surface temperature below 120°C; for optimum tube life, this temperature should be less than 100°C. For conduction cooling, refer to Adapter and Heat Sink data sheets to find the appropriate Varian adapters and liquid-cooled, convection-cooled, and conduction-cooled heat sinks.
5. Characteristic and operating values are based on performance tests. These figures may change without notice as a result of additional data or product refinement. Consult Varian Associates of Canada Ltd., before using this information for final equipment design.
6. When ordering, specify the center frequency or frequency range desired.
7. Output power is a function of frequency and maximum output is normally obtained at the high frequency end of the band. Output decreases as frequency is decreased. The ratio of output at the highest frequency to the output at the lowest frequency is typically 1.0 dB.
8. Tube couples to several waveguide sizes by use of suitable adapters or heat sinks. A type VAE-2000A26 adapter flange which mates with a UG-599/U flange on a RG-96/U waveguide is supplied with the tube unless otherwise specified.
9. Measured between half-power points.
10. This parameter varies with operating frequency and mode. For more detailed information please contact your local Varian Sales Office or Varian Associates of Canada Ltd.
11. The rate of frequency change with temperature variation is a function of tuner position. Figures apply only at the high-frequency end of the tuning range.
12. These values are acceptance limits for VRQ-2100A series tubes. Equipment design should allow for these variations.

OUTLINE DRAWING

